



Förderschneckenpumpe / Screw Pump /
Pompe à hélice transporteuse
F 520 S

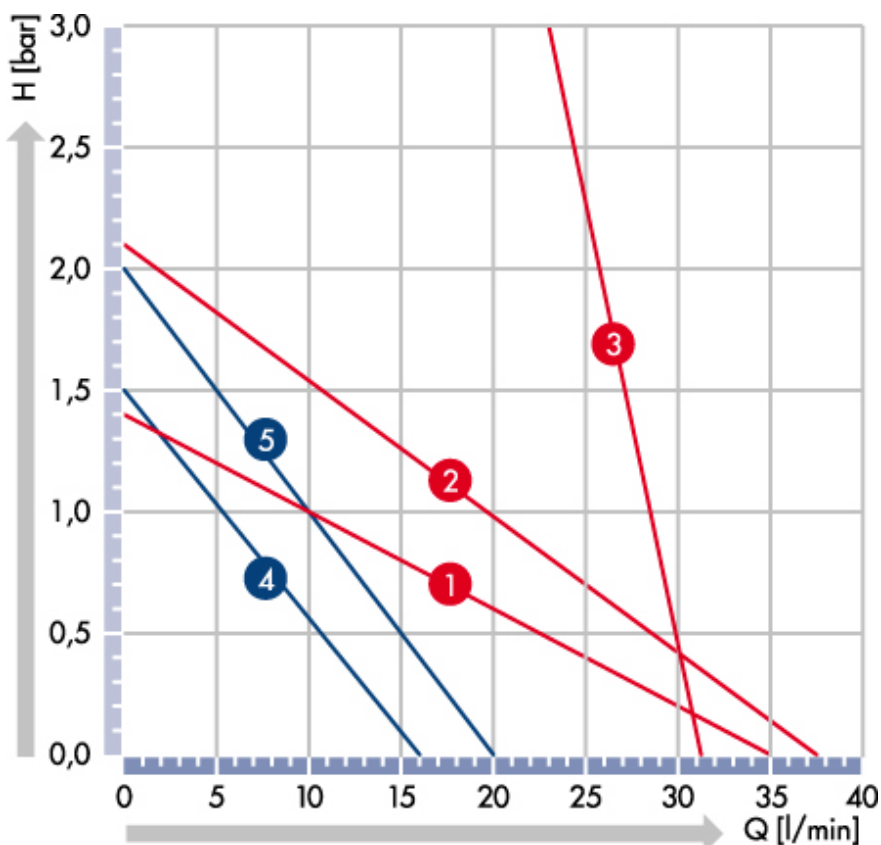

Motorleistung in kW
Capacity of motor in kW
Capacité du moteur en kW

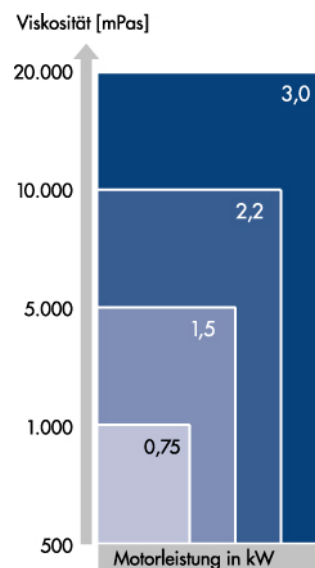

Messwerte / Values / Valeurs $\pm 10\%$
gemessen mit Wasser bei 20°C am Druckstutzen der Pumpe
obtained with water at 20°C at the outlet nozzle of the pump
mesurées avec de l'eau à 20°C au refoulement de la pompe

Leistungskurve Nr. Performance Chart No. Courbe de performance No.	Typ / Type	Viskosität mPas (cP) Viscosity mPas (cP) Viscosité mPas (cP)
1 2 3	F 520 S-50/45	1.200 2.500 20.000
4 5	F 520 S-41/37	600 2.000