



A COMPREHENSIVE RANGE OF TOP CLASS ACCESSORIES

It is not merely the pump that makes the FLUX solution a perfect equipment.

In this brochure you will find detailed information on quality, field proven accessories for FLUX barrel and container pumps.

Whether it is for portable use or stationary installation – only FLUX flexible hoses, fittings, suction strainers, liquid meters*) together with numerous other accessories will make your pumping and transfer operations safe and easy to use.


*) FLUX Liquid Meters
with electronic digital display unit
please see individual brochure

The comprehensive FLUX range of accessories ensures that FLUX have a total solution for every barrel and container pump application and that you benefit through the use of dedicated and proven accessories, whilst still providing future flexibility.

Easy to mount, with a minimum of assembly time, FLUX accessories guarantee a simple and efficient use and allow to benefit from the features of our products.

FLUX user orientated pumps and accessories provide a long and trouble free service life.

These essential accessories will complement your FLUX barrel and container pump providing a complete and perfect pumping system – meeting every requirement. FLUX always has the right pump ... and the right accessories!

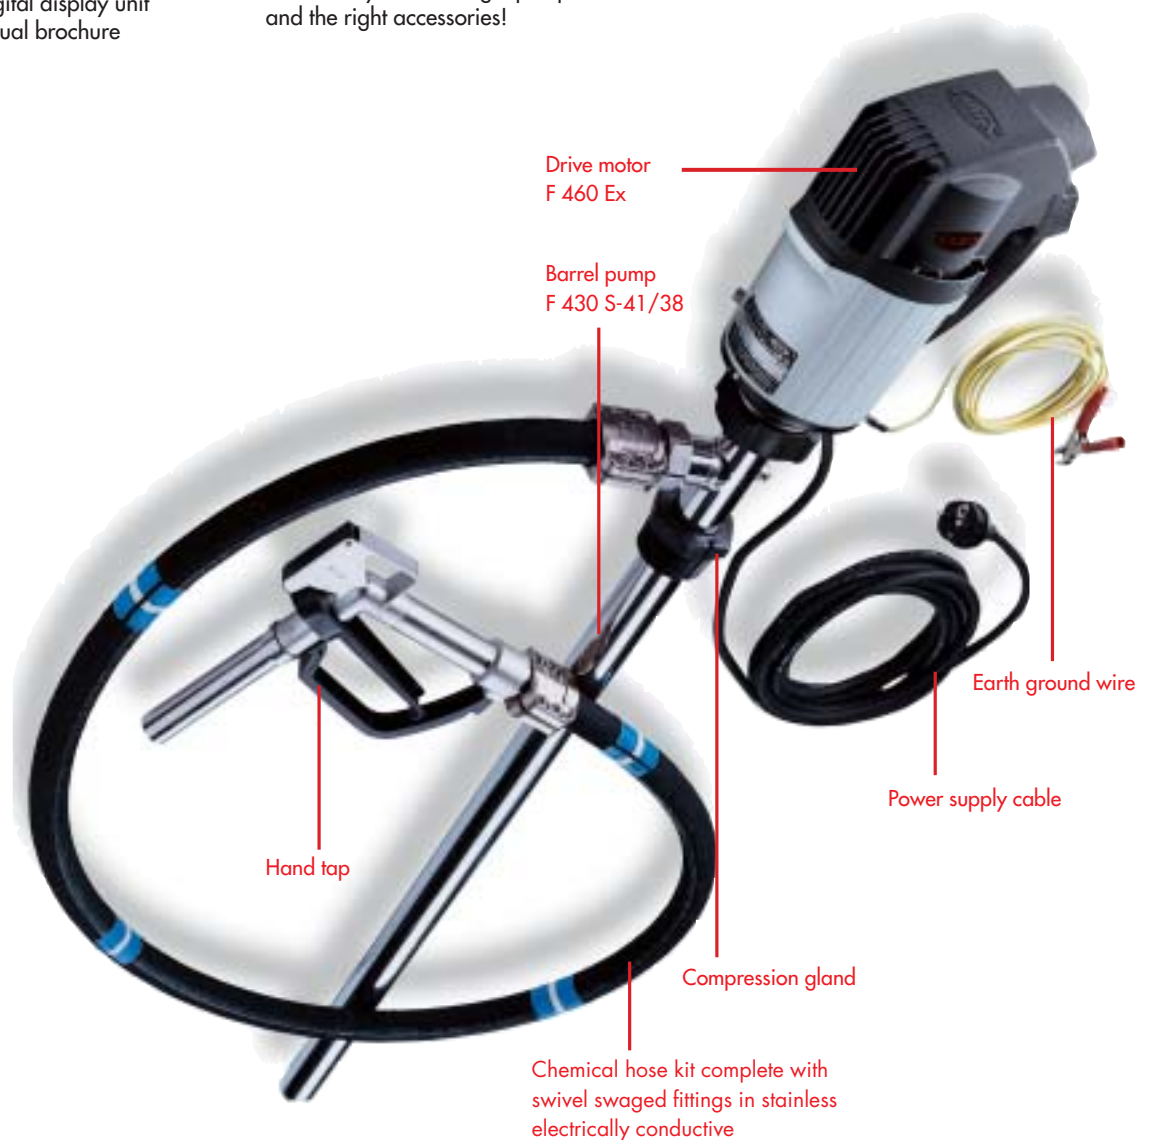



4-5

Hand taps

6-9

Flexible hoses and hose kits,
hose fittings, hose clips,
hose connections,
fume glands

10-11

Accessories for pumps:
attachment clamps,
by-pass valves,
compression glands, container clips,
discharge spouts,
float switches, flow back stop valves,
hoists,
mixing tubes, mounting flanges,
quick action coupling SSK 400,
suction strainers,
wall brackets

12-14

Accessories for drive motors:
carrying handles,
earth (ground) wires,
motor protection switches,
power supply cables,
explosion-proof plugs and sockets,
filter-regulator-lubricator units,
compressed air hoses and couplings

15

The great range of FLUX pumps



INNOVATORS IN FLOW TECHNOLOGY

	Outlet	Seal	Inlet	Part No.
	Ø 11 mm	FPM	DN 13	001 13 034
	Ø 11 mm	FPM	DN 19	001 13 039
	Ø 20 mm	FPM	DN 19	001 13 000
	Ø 20 mm	FPM	DN 25	001 13 035
	Ø 22 mm	FPM	DN 19	001 12 250
	Ø 22 mm	FPM	DN 25	001 12 252
	Ø 22 mm	EPDM	DN 19	001 12 395
	Ø 22 mm	EPDM	DN 25	001 12 382
	Ø 20 mm, 220 mm long			001 12 228
	Ø 22 mm	FPM	DN 19	001 12 251
	Ø 22 mm	FPM	DN 25	001 12 253
	Ø 22 mm	EPDM	DN 19	001 12 402
	Ø 22 mm	EPDM	DN 25	001 12 403
	Ø 28 mm	PTFE/FEP	DN 19	001 12 287
	Ø 28 mm	PTFE/FEP	DN 25	001 12 288
	Ø 28 mm	PTFE/FEP	G 1 A	001 12 289
	Ø 28 mm	PTFE/FEP	G 1 1/4 A	001 12 290
	Ø 28 mm	PTFE	Ø 32 mm	001 12 291
	Ø 20 mm, 220 mm long			001 12 285



Quick Action Tap MS

with safety handle and swivel inlet (hose connector or threaded connector); suitable for solvents and neutral liquids
Material: brass, nickel-plated
Operating pressure: max. 4 bar
Flowrate: max. 80 l/min (water)
Viscosity: max. 900 mPas (cP)
Temperature: max. 80 °C
Weight: 1,05 kg

Outlet	Seal	Inlet	Part No.
Ø 25 mm	PTFE	DN 19	001 12 396
Ø 25 mm	PTFE	DN 25	001 12 337
Ø 25 mm	PTFE	DN 32	001 12 338
Ø 25 mm	PTFE	G 1	001 12 339
Ø 25 mm	PTFE	G 1 A	001 12 389



Quick Action Tap MS

with safety handle, without inlet connector, version for direct mounting onto a hose with swivel swaged fitting.
Material: brass, nickel-plated
Operating pressure: max. 4 bar
Flowrate: max. 80 l/min (water)
Viscosity: max. 900 mPas (cP)
Temperature: max. 80 °C
Weight: 1,05 kg

Ø 25 mm	PTFE	Ø 32 mm	001 12 340
---------	------	---------	-------------------

longer outlet tube for use with fume cone, please see stainless steel version



Quick Action Tap AL

with safety handle and swivel inlet (hose connector or threaded connector); suitable for diesel oil, fuel oil, crude oil.
Material: aluminium
Operating pressure: max. 4 bar
Flowrate: max. 80 l/min (water)
Viscosity: max. 800 mPas (cP)
Temperature: max. 60 °C
Weight: 0,50 kg

Ø 25 mm	NBR	DN 19	001 12 397
Ø 25 mm	NBR	DN 25	001 12 172
Ø 25 mm	NBR	G 1	001 12 171



Quick Action Tap AL 20

spring actuated, with safety handle and rigid inlet (threaded connector) or *swivel inlet (threaded connector); suitable for petrol, diesel oil, fuel oil, crude oil.
Material: aluminium
Operating pressure: 0,5 - 4 bar
Flowrate: max. 80 l/min (water)
Viscosity: max. 50 mPas (cP)
Temperature: max. 60 °C
Weight: 0,95 kg



Ø 24 mm	PTFE	G 1 A	001 12 109
Ø 24 mm*	NBR	G 1 A	001 12 347



Quick Action Tap AL 20 R (unleaded)

spring actuated, with safety handle and swivel inlet (threaded connector); suitable for unleaded petrol and diesel oil.
Material: aluminium
Operating pressure: 0,5 - 4 bar
Flowrate: max. 80 l/min (water)
Viscosity: max. 50 mPas (cP)
Temperature: max. 60 °C
Weight: 0,95 kg

Ø 21 mm	NBR	G 1 A	001 12 097
---------	-----	-------	-------------------

		Nominal Ø	Outer-Ø	Weight	Part No.
	PVC hose with wire-helix for neutral and corrosive, low flammability liquids. Operating pressure: max. 2 bar Temperature: max. +60°C	DN 13	18 mm	0,21 kg	001 10 039
		DN 19	27 mm	0,34 kg	001 10 040
		DN 25	34 mm	0,52 kg	001 10 041
		DN 32	41 mm	0,68 kg	001 10 042
		DN 38	47 mm	0,79 kg	001 10 043
		DN 50	60 mm	1,20 kg	001 10 044
	Petroleum hose, electrically conductive for petroleum products, e.g. petrol, oil, crude oil. Tube: NBR black Cover: CR black Operating pressure: max. 10 bar Temperature: -35 °C up to +80 °C	DN 13	21 mm	0,27 kg	001 10 076
		DN 19	27 mm	0,40 kg	001 10 065
		DN 25	34 mm	0,88 kg	001 10 002
		DN 32	43 mm	1,03 kg	001 10 003
		DN 38	51 mm	1,03 kg	001 10 004
	Solvent-resistant hose, electrically conductive for short-time operations with solvents, petroleum products, aldehydes, esters and ketones. Tube: NBR light Cover: CR black Operating pressure: max. 16 bar Temperature: -35 °C up to +60 °C	DN 19	31 mm	0,67 kg	001 10 016
		DN 25	37 mm	0,83 kg	001 10 017
		DN 32	43 mm	1,09 kg	001 10 018
		DN 38	51 mm	1,46 kg	001 10 019
		DN 50	64 mm	2,05 kg	001 10 020
	Chemical hose, electrically conductive with steel helix, for the majority of acids and alkalis, petroleum products and solvents. Tube: ultra high molecular PE, transparent Cover: EPDM black Operating pressure: max. 16 bar Temperature: -35 °C up to +100 °C	DN 13	22 mm	0,40 kg	001 10 085
		DN 19	31 mm	0,80 kg	001 10 037
		DN 25	37 mm	0,90 kg	001 10 030
		DN 32	43 mm	1,20 kg	001 10 036
		DN 38	51 mm	1,50 kg	001 10 086
	Special chemical hose, electrically conductive with steel helix, for industrial alcohols, chemical and petroleum products, solvents as well as food products. Tube: fluorine polymer white Cover: CR black Operating pressure: max. 16 bar Temperature: -35 °C up to +100 °C	DN 19	31 mm	0,80 kg	001 10 097
		DN 25	37 mm	0,90 kg	001 10 046
		DN 32	44 mm	1,30 kg	001 10 029
	Special foodgrade hose for food products, milk, oil, fats, molasses and syrups. Tube: NBR white Cover: CR black Operating pressure: max. 10 bar Temperature: -25 °C up to +90 °C	DN 25	37 mm	0,80 kg	001 10 022



Petroleum hose kit


complete with swivel swaged fittings on both ends, electrically conductive. Connections G 1 1/4 – Ø 32 for direct mounting onto quick action tap MS (001 12 340)

Nominal Ø	Length	Fittings	Weight	Part No.
DN 19	2 m	brass	2,6 kg	001 10 091
DN 19	3 m	brass	3,5 kg	001 10 092

Petroleum hose kit

complete with swivel swaged fittings on both ends, electrically conductive. Connections G 1 1/4 – Ø 32 for direct mounting onto quick action tap MS (001 12 340) or quick action tap S (001 12 291)

DN 25	2 m	brass	2,6 kg	001 10 081
DN 25	3 m	brass	3,5 kg	001 10 082



Solvent-resistant hose kit

complete with swivel swaged fittings on both ends, electrically conductive. Connections G 1 1/4 – Ø 32 for direct mounting onto quick action tap MS (001 12 340) or quick action tap S (001 12 291)

DN 19	2 m	brass	2,1 kg	001 10 093
DN 19	3 m	brass	3,0 kg	001 10 094
DN 19	2 m	stainless steel	2,2 kg	001 10 095
DN 19	3 m	stainless steel	3,1 kg	001 10 096

Solvent-resistant hose kit

complete with swivel swaged fittings on both ends, electrically conductive. Connections G 1 1/4 – Ø 32 for direct mounting onto quick action tap MS (001 12 340) or quick action tap S (001 12 291)

DN 25	2 m	brass	2,3 kg	001 10 083
DN 25	3 m	brass	3,2 kg	001 10 084
DN 25	2 m	stainless steel	2,3 kg	001 10 809
DN 25	3 m	stainless steel	3,2 kg	001 10 810



Chemical hose kit


complete with swivel swaged fittings on both ends, electrically conductive. Connections G 1 1/4 – Ø 32 for direct mounting onto quick action tap MS (001 12 340) or quick action tap S (001 12 291)

DN 19	2 m	brass	2,3 kg	001 10 089
DN 19	3 m	brass	3,2 kg	001 10 090
DN 19	2 m	stainless steel	2,3 kg	001 10 087
DN 19	3 m	stainless steel	3,2 kg	001 10 088

Chemical hose kit

complete with swivel swaged fittings on both ends, electrically conductive. Connections G 1 1/4 – Ø 32 for direct mounting onto quick action tap MS (001 12 340) or quick action tap S (001 12 291)

DN 25	2 m	brass	2,3 kg	001 10 811
DN 25	3 m	brass	3,2 kg	001 10 812
DN 25	2 m	stainless steel	2,3 kg	001 10 807
DN 25	3 m	stainless steel	3,2 kg	001 10 808



Swaged hose fittings

for mounting onto both ends of electrically conductive hose when used in hazardous areas and/or with high flammability liquids.

Suitable for mounting onto petroleum, solvent-resistant, chemical, special chemical and foodgrade hoses.

On request the hoses will be supplied completely mounted and certified in order to ensure an electrostatic discharge.

HE = ferrule type with union nut (female thread)

SF = version with pinned safety clamps (Spannfix)

SL = version with bolted clamps (Spannloc)

Inside-Ø – Connection	Outer-Ø	Weight	Part No.
-----------------------	---------	--------	----------

Version: brass

DN 13 – G 1/2	HE	21 mm	0,17 kg	959 13 130
DN 19 – G 1	HE	27 mm	0,17 kg	959 13 116
DN 19 – G 1A	HE	27 mm	0,19 kg	959 13 118
DN 19 – G 1 1/4	HE	27 mm	0,20 kg	959 13 192
DN 19 – Ø 32 mm	HE	27 mm	0,20 kg	959 13 134
DN 19 – G 1	SL	31 mm	0,22 kg	959 13 157
DN 19 – G 1A	SL	31 mm	0,22 kg	959 13 156
DN 19 – G 1 1/4	SL	31 mm	0,26 kg	959 13 180
DN 19 – Ø 32 mm	SL	31 mm	0,30 kg	959 13 191
DN 25 – G 1	HE	34 mm	0,21 kg	959 13 097
DN 25 – G 1A	HE	34 mm	0,23 kg	959 13 099
DN 25 – G 1 1/4	HE	34 mm	0,26 kg	959 13 098
DN 25 – Ø 32 mm	HE	34 mm	0,30 kg	959 13 137
DN 25 – G 1	SF	37 mm	0,55 kg	959 13 158
DN 25 – G 1A	SF	37 mm	0,55 kg	959 13 159
DN 25 – G 1 1/4	SF	37 mm	0,55 kg	959 13 140
DN 25 – Ø 32 mm	SF	37 mm	0,25 kg	959 13 152
DN 32 – G 1 1/4	SF	43 mm	0,31 kg	959 13 014
DN 32 – G 1 1/2	SF	43 mm	0,44 kg	959 13 015
DN 38 – G 1 1/2	SF	51 mm	0,50 kg	959 13 143
Reducing adapter G 1 1/4 – G 1A				959 06 019
Reducing adapter G 1 1/2 – G 1 1/4A				959 06 002



Swaged hose fittings

SF = version with pinned safety clamps (Spannfix)
SL = version with bolted clamps (Spannloc)

Inside-Ø – connection Outer-Ø Weight Part No.

Version: stainless steel/aluminium

DN 19 – G 1	SL	31 mm	0,20 kg	959 13 160
DN 19 – G 1¼	SL	31 mm	0,20 kg	959 13 181
DN 19 – Ø 32 mm	SL	31 mm	0,20 kg	959 13 190
DN 25 – G 1	SF	37 mm	0,24 kg	959 13 161
DN 25 – G 1A	SF	37 mm	0,24 kg	959 13 162
DN 25 – G 1¼	SF	37 mm	0,24 kg	959 13 144
DN 25 – Ø 32 mm	SF	37 mm	0,24 kg	959 13 151
DN 32 – G 1¼	SF	43 mm	0,35 kg	959 13 145
DN 32 – G 1½	SF	43 mm	0,50 kg	959 13 146
DN 38 – G 1½	SF	51 mm	0,50 kg	959 13 147

Reducing adapter G 1½ – G 1¼A **959 06 005**



Hose clips

in steel, chromium-zinc-plated, for secure fixing of the hose onto the hose connector of the pump. For use with low flammability liquids only.

Clamping range


11–13 mm	959 13 139
15–18 mm	959 13 127
17–20 mm	959 13 084
19–22 mm	959 13 070
25–28 mm	959 13 183
27–31 mm	959 13 071
31–34 mm	959 13 184
34–37 mm	959 13 072
37–40 mm	959 13 073
40–43 mm	959 13 129
42–45 mm	959 13 074
48–51 mm	959 13 075
50–53 mm	959 13 076



Hose clips

in stainless steel, screw type, for secure fixing of the hose onto the hose connector of the pump. For use with low flammability liquids only.

08–12 mm	959 13 166
10–16 mm	959 13 120
16–27 mm	959 13 165
23–35 mm	959 13 164
30–45 mm	959 13 167
40–60 mm	959 13 006
50–70 mm	959 13 007



Hose connection complete

consisting of: nut, hose connector and seal. Connection thread G 1 (PP) or G 1¼ (MS and S) for pumps JUNIORFLUX F 310 and F 314.

Material Nominal-Ø Weight Part No.

polypropylene (PP)	DN 13+19	0,02 kg	959 04 135
brass, nickel-plated (MS)	DN 13	0,04 kg	959 04 132
stainless steel (S)	DN 13	0,05 kg	959 04 133



Hose connection complete

consisting of: nut, hose connector and seal. Connection thread G 1¼ female barrel pumps type F 424 – F 430.

polypropylene (PP)	DN 19	0,03 kg	959 04 053
polypropylene (PP)	DN 25	0,03 kg	959 04 052
polypropylene (PP)	DN 32	0,04 kg	959 04 054
polyvinylidenfluoride (PVDF)	DN 39	0,05 kg	959 04 054
polyvinylidenfluoride (PVDF)	DN 25	0,05 kg	959 04 101
polyvinylidenfluoride (PVDF)	DN 32	0,05 kg	959 04 102
aluminium (AL)*	DN 19	0,10 kg	959 04 050
aluminium (AL)*	DN 25	0,10 kg	959 04 039
aluminium (AL)*	DN 32	0,10 kg	959 04 040
stainless steel (S)*	DN 19	0,14 kg	959 04 061
stainless steel (S)*	DN 25	0,14 kg	959 04 041
stainless steel (S)*	DN 32	0,15 kg	959 04 042
Hastelloy C (HC)*	DN 25	0,25 kg	959 04 043
Hastelloy C (HC)*	DN 32	0,25 kg	959 04 044

** with union nut in brass, nickel-plated





Hose connection complete
consisting of: nut, hose connector
and seal. Connection thread
Rd 58 x 1/6 for sanitary pumps
F 427 S4-43/38 and F 560 S/GS1

Material	Nominal-Ø	Weight	Part No.
stainless steel (S)	DN 25	0,37 kg	959 04 115
stainless steel (S)	DN 32	0,37 kg	959 04 134
stainless steel (S)	DN 38	0,37 kg	959 04 130



Hose connection complete
with connection Clamp 1 1/2"
for sanitary pump F 427 S3A-43/38

stainless steel (S)	DN 19	0,42 kg	959 04 138
---------------------	-------	---------	-------------------



Hose connection complete
consisting of: nut, hose connector
and seal. Connection thread
G 1 1/2 for high viscosity liquid
pumps F 520 – F 560

stainless steel (S)	DN 25	0,17 kg	959 04 002
stainless steel (S)	DN 32	0,33 kg	959 04 003
stainless steel (S)	DN 38	0,28 kg	959 04 004



Hose connection complete
with connection Clamp 2
for sanitary pumps F 560 S/GS3A

stainless steel (S)	DN 38	0,30 kg	959 04 109
---------------------	-------	---------	-------------------



Fume gland (compression gland)
prevents highly corrosive
vapours, which may cause
damage to the user and the
environment, from escaping
from the barrel or closed container.

The fume gland consists of a
valve part and a screw socket
= threaded ring.
It is used with a barrel pump.

For use with a gas compensation
hose, hose nozzle (959 13 128)
is required.

¹⁾ with flat seal
²⁾ with o-ring



Connection thread	Pump-Ø	Weight	Part No.
-------------------	--------	--------	----------

Valve part in polypropylene (PP)

with ball valve and	25 mm	0,11 kg	001 14 309
union nut Rd 65 x 1/6	32 mm	0,11 kg	001 14 313
	40 mm	0,12 kg	001 14 181
	41 mm	0,12 kg	001 14 182
	50 mm	0,12 kg	001 14 243

Threaded ring in polypropylene (PP), flat seal in FPM

male thread G 2	40/41 mm	0,09 kg	001 14 218
male thread S 57 x 4	40/41 mm	0,09 kg	001 14 224
female thread S 70 x 6	40/41 mm	0,10 kg	001 14 226
male thread S 70 x 6 ¹⁾	40/41 mm	0,10 kg	001 14 232
male thread S 70 x 6 ²⁾	40/41 mm	0,10 kg	001 14 236
male thread G 2 A	40/41 mm	0,13kg	001 14 238
male thread S 70 x 6	50 mm	0,13 kg	001 14 267
female thread S 70 x 6	50 mm	0,13 kg	001 14 269

Valve part in stainless steel 316 Ti (S), flat seal in PE

with ball valve and	28 mm	0,52 kg	001 14 319
union nut Rd 65 x 1/6	41 mm	0,68 kg	001 14 192
	50 mm	0,68 kg	001 14 253

Threaded ring in stainless steel 316 Ti (S)

male thread G 2	41 mm	0,69 kg	001 14 325
male thread S 57 x 4	41 mm	0,69 kg	001 14 329
male thread G 2	50 mm	0,70 kg	001 14 331

Valve part in brass, nickel-plated

with ball valve and	41 mm	0,72 kg	001 14 196
union nut Rd 65 x 1/6	50 mm	0,80 kg	001 14 255

Threaded ring in brass, nickel-plated (MS), flat seal in PE

male thread G 2	41 mm	0,69 kg	001 14 327
male thread G 2	50 mm	0,73 kg	001 14 333

Corrugated hose in PE DN 10
to be used as a gas compensation hose.



Hose nozzle DN 10 (PP)
for direct mounting onto valve part
when used with gas compensation hose



Fume cone PP
for use with longer outlet tube
Ø 20 mm

outer-Ø 13 mm	0,23 kg	001 10 061
Connection: male thread 1/4-NPT	0,005 kg	959 13 128
	0,10 kg	001 14 285

	Discharge spout with union nut G 1 1/4 for direct mounting onto the pump outlet in order to allow the filling of adjacent containers and tanks.	Material	Outlet	Weight	Part No.
		aluminium (AL)	DN 25	0,12 kg	959 07 003
		stainless steel (S)	DN 25	0,38 kg	959 07 007
		polypropylene (PP)	DN 19	0,04 kg	959 07 009
	Attachment clamp to securely fasten the pump in open containers or barrels.	Pump-Ø	Weight	Part No.	
		40/41 mm	0,84 kg	001 10 601	
		50 mm	0,84 kg	001 10 603	
		54 mm	0,84 kg	001 10 604	
	Container clip to suspend the pump into open containers.	Material	Pump-Ø	Weight	Part No.
		aluminium (AL),	40/41 mm	0,12 kg	001 15 005
		PVC-coated	50 mm	0,14 kg	001 15 006
	Mounting flange acc. to DIN 2501 for stationary installation of the barrel pump. The flange is welded onto the outer tube of the pump. Dimensions: outer-Ø 165 mm, pitch circle-Ø 125 mm, bores 4 x 18 mm	Material	Weight	Part No.	
		polypropylene	0,37 kg	947 14 021	
		polyvinylidenfluoride	0,70 kg	947 14 034	
		stainless steel 316 Ti	1,50 kg	947 14 033	
	Compression gland in PP to secure the pump in the bunghole of the barrel.	Connection thread	Pump-Ø	Weight	Part No.
		male thread G 2	40/41 mm	0,10 kg	001 14 054
	Compression gland in steel/zinc-plated to secure the pump in the bunghole of the barrel.	male thread G 2	50 mm	0,10 kg	001 14 062
		male thread G 2/M 64 x 4	40 mm	0,51 kg	001 14 061
		male thread G 2/M 64 x 4	41 mm	0,51 kg	001 14 000
		male thread G 2	50 mm	0,51 kg	001 14 003
		male thread M 64 x 4	50 mm	0,51 kg	001 14 002
	Hoist with infinitely adjustable load balancer for easy lifting and positioning of the pump.	Carrying force	Rope length	Weight	Part No.
		9 – 14 kg	2 m	3,75 kg	001 21 000
		16 – 21 kg	2 m	4,15 kg	001 21 002
	Suction strainer for mounting on the pump suction to protect the pump against coarse impurities. * for use with F 424 S-43/38 and -43/37Z	Material	Pump-Ø	Weight	Part No.
		polypropylene (PP)	40/41 mm	0,03 kg	001 10 200
			50 mm	0,04 kg	001 10 205
		polyvinyliden-	40/41 mm	0,04 kg	001 10 245
		fluoride (PVDF)	50 mm	0,06 kg	001 10 267
		stainless steel (S)	41 mm	0,17 kg	001 10 209
			41 mm*	0,17 kg	001 10 294
			50 mm	0,19 kg	001 10 212

11

		Motor type	Weight	Part No.
	Carrying handle, steel painted in black for pumps with commutator motor, allowing easy immersion and removal of the pump.	F 457	0,35 kg	001 10 533
		F 458, F 458-1, F 460 Ex, F460-1 Ex	0,35 kg	001 10 557
	Carrying handle, steel painted in black for pumps with three-phase motor or air motor.	Three-phase gearmotor F 414	0,37 kg	001 10 527
		Explosion-proof three-phase motor up to 3,3 kW	1,63 kg	001 10 567
		Air motor FPM 2 – 8 Ex	1,00 kg	001 10 520
	Carrying handle, stainless steel for pumps with single-phase AC-motor (AC) or three-phase motor.	AC-motor F 403	0,85 kg	001 10 575
		Three-phase motor up to 3 kW	1,20 kg	001 10 571
		Three-phase motor up to 4 kW	1,43 kg	001 10 531
		Length	Weight	Part No.
	Earth (ground) wire complete with crocodile clip for electrically bonding the explosion-proof pump to the container.	2 m	0,12 kg	931 90 008
		3 m	0,16 kg	931 90 013
		2 m (re-inforced version)	0,15 kg	931 90 015
		for Motors	Range of setting	Part No.
	Motor protection switch fitted with 2 cable inlets, direct mounting on the motor; to protect the three-phase motor against overloading. Protected to IP 55. Weight: 0,85 kg	0,55 kW 2850min ⁻¹	0,9–1,6 A	936 06 045
		0,75 kW 700min ⁻¹	1,5–2,5 A	936 06 033
		0,75 kW 930min ⁻¹	1,5–2,5 A	936 06 033
		0,75 kW 2850min ⁻¹	1,5–2,5 A	936 06 033
		1,1 kW 930min ⁻¹	2,4–3,5 A	936 06 034
		1,1 kW 2850min ⁻¹	2,4–3,5 A	936 06 034
		1,1 kW 700min ⁻¹	3,2–5,5 A	936 06 035
		1,5 kW 2850min ⁻¹	3,2–5,5 A	936 06 035
		2,2 kW 2850min ⁻¹	3,2–5,5 A	936 06 035
		3,0 kW 2850min ⁻¹	5,0–8,5 A	936 06 036
		4,0 kW 2850min ⁻¹	5,0–8,5 A	936 06 036
	Motor protection switch explosion-proof to II 2 G EEx de IIC T6, protected to IP 65. Fitted with 2 cable inlets, to be mounted on the carrying handle. Weight: 2,64 kg The ranges of setting apply to 400 Volt only.	0,75 kW 2850min ⁻¹	1,6–2,5 A	936 06 118
		0,75 kW 930min ⁻¹	1,6–2,5 A	936 06 118
		0,75 kW 700min ⁻¹	1,6–2,5 A	936 06 118
		0,95 kW 700min ⁻¹	2,5–4,0 A	936 06 119
		1,1 kW 2850min ⁻¹	1,6–2,5 A	936 06 118
		1,1 kW 930min ⁻¹	2,5–4,0 A	936 06 119
		1,1 kW 700min ⁻¹	2,5–4,0 A	936 06 119
		1,5 kW 2850min ⁻¹	2,5–4,0 A	936 06 119
		2,0 kW 2850min ⁻¹	2,5–4,0 A	936 06 119
		2,5 kW 2850min ⁻¹	4,0–6,5 A	936 06 120
		3,3 kW 2850min ⁻¹	4,0–6,5 A	936 06 120
		Length	Weight	Part No.
	Power supply cable H07RN-F4Gx1,5 for three-phase motors.	yard ware	0,26 kg/m	934 08 901
		5 m	1,30 kg	934 08 025
	Cekon plug, 5-pole		0,14 kg	937 01 014
	Power supply cable complete with Cekon plug, 5-pole , for three-phase motors.	5 m	1,42 kg	934 08 020

	System	Weight	Part No.
 	CEAG	0,35 kg	937 01 030
	Stahl	0,27 kg	937 01 018
	CEAG	0,95 kg	937 50 041
	Stahl	0,92 kg	937 50 022
 	CEAG	0,35 kg	937 01 029
	Stahl	0,27 kg	937 01 018
	CEAG	0,35 kg	937 50 040
	Stahl	0,27 kg	937 50 022

	Connection	Weight	Part No.
	G 1/4 – G 1/4 (F416..Ex)	0,75 kg	001 10 100
	G 1/2 – G 1/2 (FPM..Ex)	1,90 kg	001 10 103

for compressed air motors type F 416 Ex, F 416-1 Ex, F 416-2 Ex and FPM 2 – 8 Ex;
for air conditioning and regulation of the operating pressure.
Consisting of: water separator, pressure gauge and lubricator.
Female thread on inlet and outlet.

	Description / Material	Inside-Ø	Part No.
	electrically conductive, blue colour	DN 10	001 10 098
	PVC	DN 13	001 10 008
	brass	DN 10	959 13 066
	brass	DN 13	959 13 122
	brass	DN 10–G 1/4 A	959 13 065
	brass	DN 13–G 1/2 A	959 13 121
	brass	DN 10–G 1/4 A	959 05 022
	brass	DN 13–G 1/2 A	959 05 017

NOTES

THE GREAT RANGE OF FLUX PUMPS

YES!

I am interested in top class pump technology.
Please send the following catalogues:

- ☐ FLUX JUNIORFLUX
- ☐ FLUX CONTAINER PUMPS
- ☐ FLUX BARREL AND CONTAINER PUMPS
- ☐ FLUX HIGH VISCOSITY LIQUID PUMPS
- ☐ FLUX AIR-OPERATED DIAPHRAGM PUMPS
- ☐ FLUX LIQUID METERS
- ☐ FLUX PROCESS CONTROL SYSTEM PCS



THE GREAT RANGE OF FLUX PUMPS

Mr. / Mrs:

Company:

Address:

ZIP / City / Country:

Telephone:

Fax:

eMail:

Please mark with a cross, complete the address and then sent us a fax. Fax number see on the back side!



INNOVATORS IN FLOW TECHNOLOGY



WORLD OF PUMPS – PUMPS FOR THE WORLD

All around the globe, FLUX is synonymous with top standards in pump technology. Whether it is barrel pumps, high viscosity liquid pumps, vertical centrifugal immersion pumps, air-operated diaphragm pumps, liquid meters, mixers or top class accessories – FLUX with its complete and comprehensive range is always the one to address to. Benefit from our competence. We look forward to hearing from you!



FLUX-GERÄTE GMBH

Talweg 12 · D-75433 Maulbronn
Tel. 070 43/101-0 · Fax 070 43/101-444
Fax International +49 70 43 / 1 01 -555
info@flux-pumpen.de · www.flux-pumpen.de